




TRACK

FLOOR COVERING

classificazione al fuoco resistance against fire clasificación al fuego classement feu	Bfl
aspetto - aspect aspecto - aspect	piano - flat plano - plat
composizione composition composición composition	60% fibra polipropilenica - 20% fibra poliammidica - 20% fibra poliestere 60% PP - 20% PA - 20% PES 60% fibra de polipropileno - 20% fibra poliamídica - 20% fibra de poliéster 60% fibre de polypropylène - 20% fibre de polyamide - 20% fibre de polyester
impregnazione - soakage impregnación - enduction	parziale - partial parcial - partielle
peso totale - total weight peso total - poids total	1350 g/m ²
dimensione pezze size of the rolls medida piezas dimension des pièces	h. cm 200 x ml 30 - h. cm 400 a richiesta per quantitativo minimo h. cm 200 x ml 30 - h. cm 400 on demand for minimum quantities h. cm 200 x ml 30 - h. cm 400 a petición de una cantidad mínima h. cm 200 x ml 30 - h. cm 400 sur demande selon quantité minimum à définir
numero colori - number of colours número de colores - nombre de colores	9
destinazione use utilización utilisation	traffico intenso, scuole, banche, negozi, uffici, alberghi, ristoranti, mostre, esposizioni, locali pubblici, cinema heavy traffic, schools, banks, offices, shops, hotels, restaurants, shows, expositions, public buildings, cinemas tráfico intenso, bancos, escuelas, oficinas, tiendas, hoteles, restaurantes, salones, exposiciones, locales públicos, cines tráfico intensif, banques, écoles, bureaux, boutiques, hotels, restaurants, expositions, salons, locaux publics, cinémas

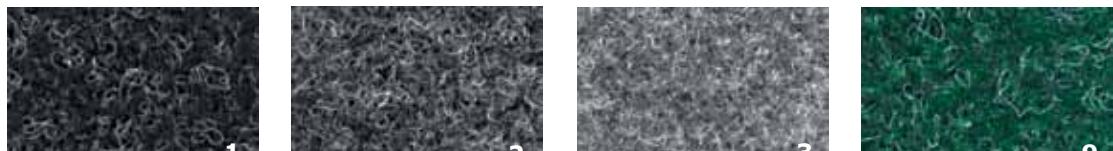

* COLORI IN ESAURIMENTO